



SM screw feeder (POWDER FEEDERS)



SEIWA GIKEN

SM screw feeder



☑Variety of screw size

Selectable diameters of feeder
φ25.4 φ38 φ48.6 φ60.5 φ76.3

☑Stainless Hopper

Standard size: 20L
10~100L are available

☑Agitator

To break powder bridging
※Optional function

☑Custom-made

Specifications tailored to the
installation

Compact and tabletop device

You can install, or remove it whenever you need to use.




Disassemble with no tools

✓ It can be disassembled and assembled in less than 30 seconds without any tools.

This reduces the time needed for preparation and cleanup."



Variety size of screw

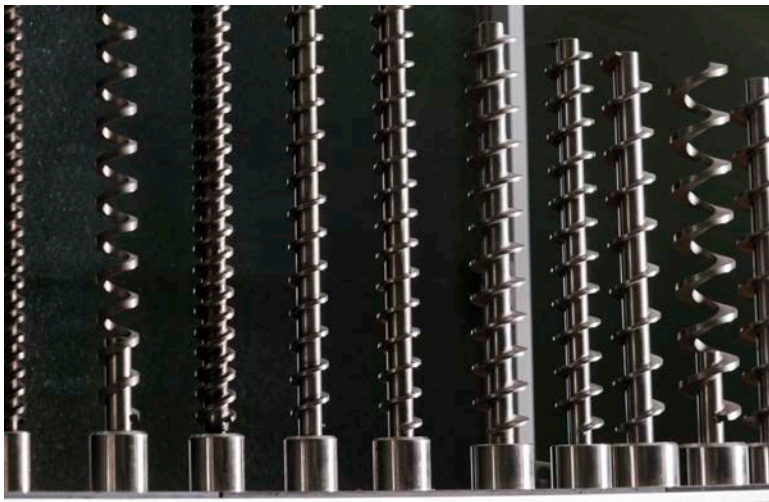

✓ We offer a wide range of screw types.


Based on our extensive experience, we select the best one that match the characteristics of the powder.

Custom-made

✓ We can design equipment tailored to your installation environment. Please feel free to consult us about connecting with previous and subsequent devices or making dimensional adjustments.



Size

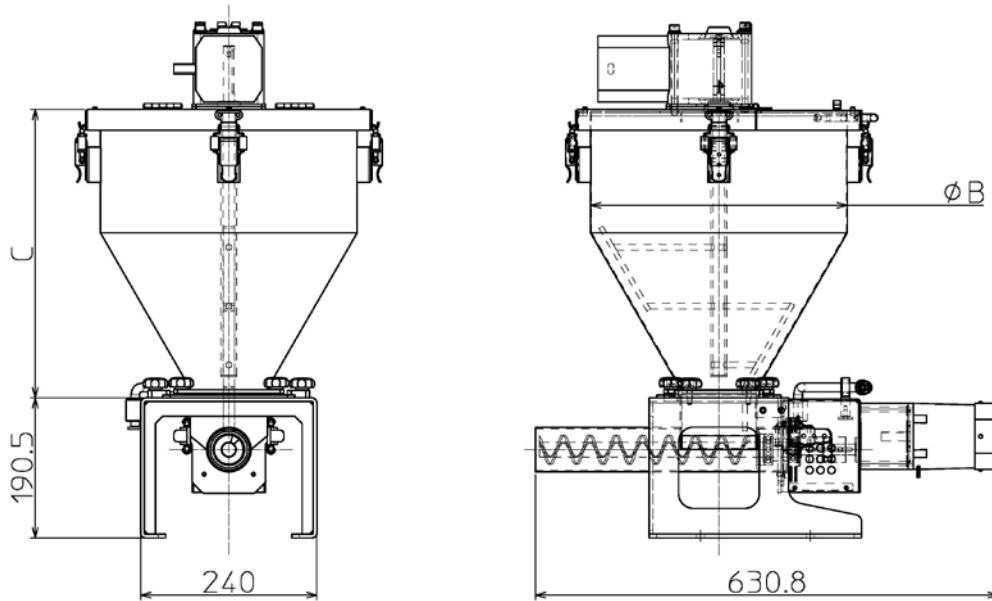

Hopper capacity(L)	10	20	30	40	50	60	80	100
B	350	350	350	400	400	500	500	500
C	330	395	505	545	635	565	685	802


Standard specification



Feeder diameter	$\phi 25.4$, $\phi 38$, $\phi 42.7$, $\phi 48.6$, $\phi 60.5$, $\phi 76.3$
Screw type	Normal, Shaftless, Twin screw, Double start
Hopper size	20L(Standard) 10L, 30L, 40L, 50L, 100L
Optional function	Bridge breaker(Agitator) Mounted on the lid
Input voltage	100V AC Single phase(50/60hz)
External dimension	W418×D630×H700mm ※In case of spec: $\phi 42.7$ screw feeder and 20L hopper with bridge breaker
Total weight	Approx: 20kg ※In case of spec: $\phi 42.7$ screw feeder and 20L hopper with bridge breaker

About us

Over 50 years of experience and technology
lead you to success
from Hiroshima, **JAPAN**

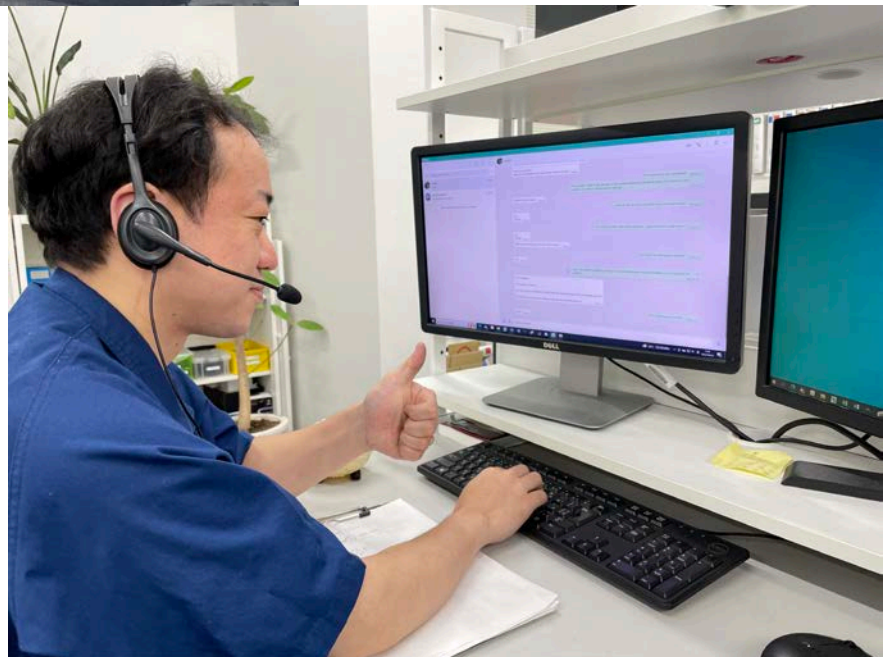

Screw feeder manufacturer

SEIWA GIKEN

141-2 Kamikouchi, Itsukaichi-chou, Saeki-ku, Hiroshima-shi, Hiroshima-ken, Japan

Phone : +81-82-927-1221 Fax : +81-82-927-1222

<https://seiwag-us.com/>